

Butt Welding Fittings

EN-DIN-ISO-ASME




ROKE
Valves and Fittings

www.chinaroke.com

CURVE 2D

ELBOWS BA 2

EN 10253-1 - DIN 2605/1 - ISO 3419

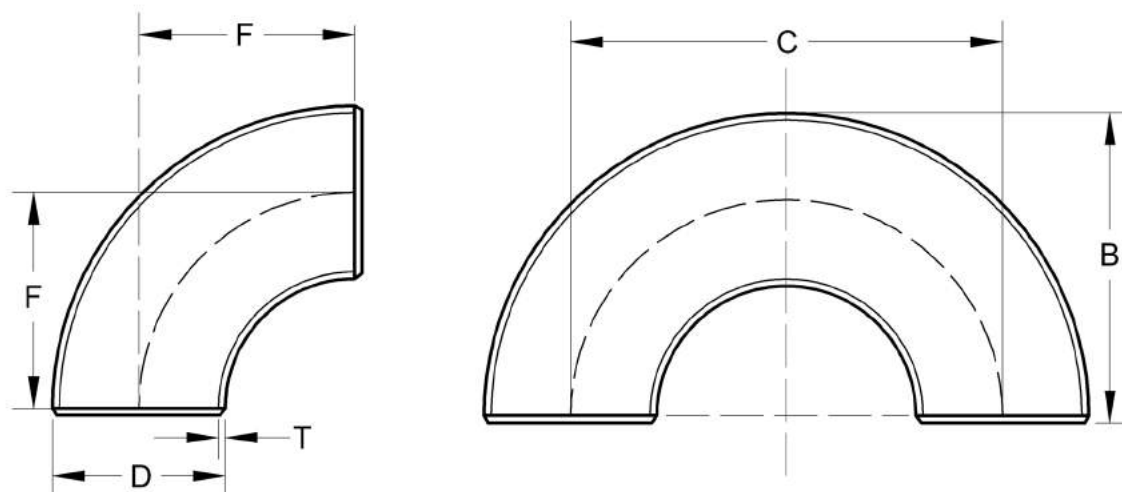


Dimensioni in mm.

D	T	F	C	B	Kg.	
					90°	180°
21.3	2.0	17.5	35	28	0.06	0.12
26.9	2.3	25	50	39	0.07	0.14
33.7	2.6	25	50	42	0.08	0.16
42.4	2.6	32	64	53	0.13	0.26
48.3	2.6	38	76	62	0.18	0.36
60.3	2.9	51	102	81	0.33	0.66
	4.5				0.50	1.00
	5.6				0.61	1.22
76.1	2.9	63	127	102	0.56	1.12
88.9	3.2	76	152	121	0.81	1.62
	5.6				1.38	2.76
101.6	3.6	95	190	146	1.22	2.44
108.0	3.6	100	200	154	1.46	2.92
114.3	3.6	102	203	159	1.58	3.16
	6.3				2.89	5.78
	8.8				3.67	7.34
139.7	4.0	127	254	197	2.67	5.34
168.3	4.5	152	305	237	4.34	8.68
	7.1				6.74	13.48
	11.0				10.20	20.40
219.1	6.3	203	406	313	10.50	21.00
	8.0				13.30	26.60
	12.5				20.30	40.60
273.0	6.3	254	508	391	15.50	31.00
323.9	7.1	305	610	467	28.60	57.20
355.6	8.0	356	711	533	30.50	61.00
406.4	8.8	406	813	610	55.00	110.00
457.2	10.0	457	914	686	80.00	160.00
508.0	11.0	508	1016	762	109.00	218.00
609.6	12.5	609	1219	914	175.00	350.00

CURVE 3D

ELBOWS BA 3

EN 10253-1 - DIN 2605/1 - ISO 3419

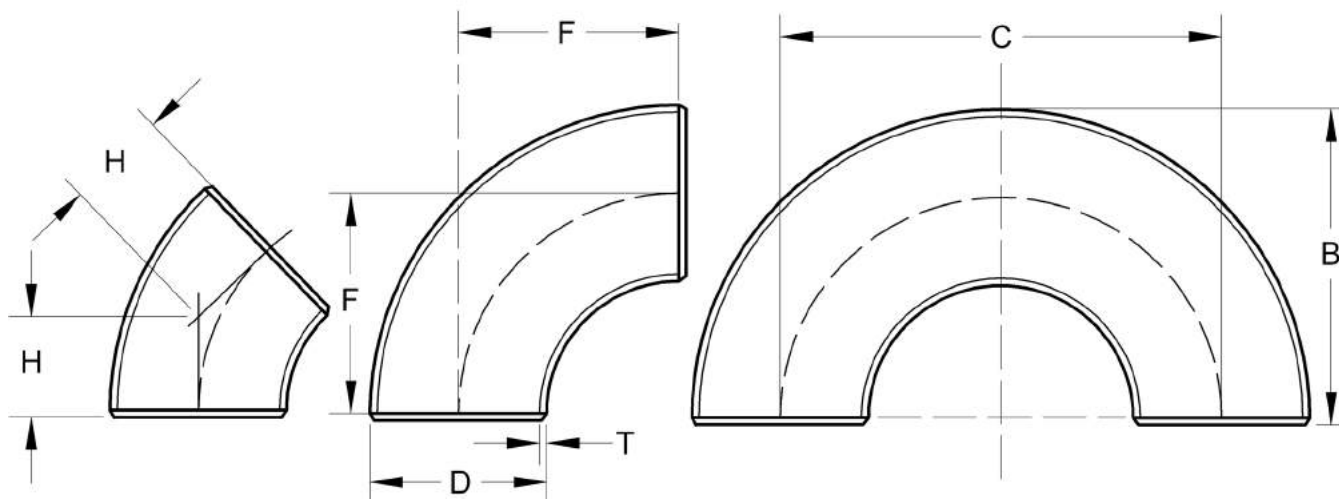


Dimensioni in mm.

D	T	H	F	C	B	Kg.		
						45°	90°	180°
21.3	2.0	12	29	56	38	0.02	0.04	0.08
	3.2					0.03	0.07	0.14
	4.0					0.04	0.08	0.16
25.0	2.0	—	27.5	—	40	0.03	0.06	0.12
26.9	2.3	12	29	57	43	0.03	0.06	0.12
	3.2					0.04	0.09	0.18
	4.0					0.05	0.10	0.20
30.0	2.6	—	33.5	—	48	0.04	0.09	0.18
31.8	2.6	—	35	—	51	0.05	0.11	0.22
33.7	2.6	16	38	76	56	0.06	0.12	0.24
	3.2					0.07	0.15	0.30
	4.0					0.09	0.18	0.36
38.0	2.6	19	45	90	64	0.08	0.16	0.32
42.4	2.6	20	48	95	70	0.10	0.19	0.40
	3.6					0.13	0.26	0.52
	4.0					0.15	0.29	0.58
44.5	2.6	22	51	102	73	0.11	0.22	0.44
48.3	2.6	24	57	114	83	0.14	0.27	0.54
	4.0					0.20	0.39	0.78
	4.5					0.22	0.44	0.88
	5.0					0.24	0.48	0.96
51.0	2.6	—	63.5	—	88	0.16	0.31	0.62
54.0	2.6	28	68.5	137	95	0.20	0.40	0.80
57.0	2.9	29	72	144	100	0.22	0.44	0.88
60.3	2.9	35	76	152	106	0.25	0.49	0.98
	4.5					0.37	0.74	1.48
	5.6					0.45	0.90	1.80
63.5	2.9	—	82.5	—	114	0.28	0.57	1.14
70.0	2.9	38	92	184	127	0.35	0.70	1.40
76.1	2.9	44	95	191	132	0.40	0.79	1.60
	5.0					0.66	1.31	2.62
	7.1					0.91	1.81	3.62
82.5	3.2	—	107.5	—	149	0.54	1.07	2.14
88.9	3.2	47	114	229	159	0.61	1.22	2.44
	5.6					1.03	2.07	4.14
	8.0					1.43	2.86	5.72
101.6	3.6	55	133	267	184	0.92	1.83	3.66
108.0	3.6	58	142.5	285	196	1.04	2.08	4.16
114.3	3.6	63	152	305	210	1.19	2.37	4.74
	6.3					2.01	4.02	8.04
	8.8					2.73	5.46	10.92

CURVE 3D

ELBOWS BA 3

EN 10253-1 - DIN 2605/1 - ISO 3419

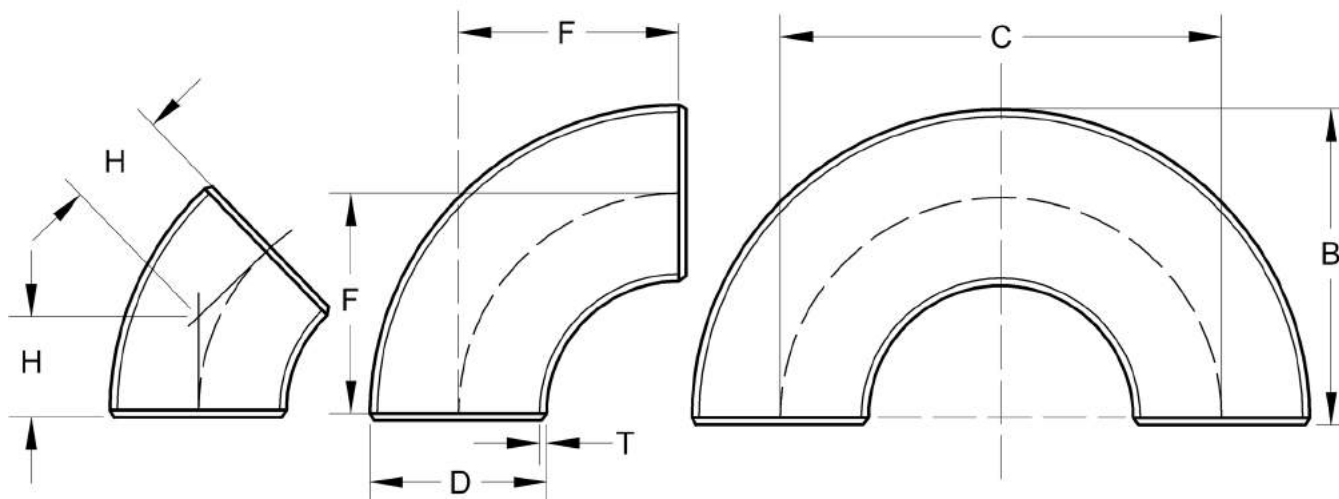


Dimensioni in mm.

D	T	H	F	C	B	Kg.		
						45°	90°	180°
127.0	4.0	—	175	—	238	1.67	3.34	6.68
133.0	4.0	75	181	362	247	1.82	3.64	7.28
139.7	4.0	79	190	381	262	2.02	4.04	8.08
	6.3					3.10	6.20	12.40
	10.0					4.79	9.57	19.14
152.4	4.5	—	215	—	291	2.78	5.55	11.10
159.0	4.5	90	216	432	295	2.90	5.80	11.60
168.3	4.5	95	229	457	313	3.25	6.50	13.00
	7.1					5.10	10.20	20.40
	11.0					7.70	15.40	30.80
193.7	5.6	112	270	540	367	5.30	10.60	21.20
219.1	4.5	127	305	610	414	5.70	11.40	22.80
	6.3					7.90	15.80	31.60
	8.0					9.95	19.90	39.80
	12.5					15.35	30.70	61.40
244.5	6.3	141	340	680	462	9.90	19.80	39.60
273.0	5.0	159	381	762	518	9.90	19.80	39.60
	6.3					12.45	24.90	49.80
	8.8					17.15	34.30	68.60
323.9	5.6	190	457	914	619	15.80	31.60	63.20
	7.1					20.00	40.00	80.00
	10.0					27.75	55.50	111.00
355.6	5.6	222	533	1067	711	20.30	40.60	81.20
	8.0					28.60	57.20	114.40
	10.0					35.75	71.50	143.00
406.4	6.3	254	610	1219	813	29.80	59.60	119.20
	8.8					41.10	82.20	164.40
	12.5					58.50	117.00	234.00
457.2	6.3	286	686	1372	914	37.75	75.50	151.00
	10.0					59.50	119.00	238.00
508.0	6.3	318	762	1524	1016	46.75	93.50	187.00
	11.0					81.00	162.00	324.00
609.6	6.3	381	914	1828	1219	66.50	133.00	266.00
	12.5					133.00	266.00	532.00
711.2	7.1	444	1067	2134	1422	101.50	203.00	406.00
	12.5					—	—	—
812.8	8.0	507	1219	2438	1626	—	299.00	—
	12.5					—	—	—
914.0	10.0	570	1372	2744	1829	—	—	—
	12.5					—	—	—
1016.0	10.0	634	1524	3048	2032	—	—	—
	12.5					—	—	—

CURVE 5D

ELBOWS BA 5

EN 10253-1 - DIN 2605/1 - ISO 3419

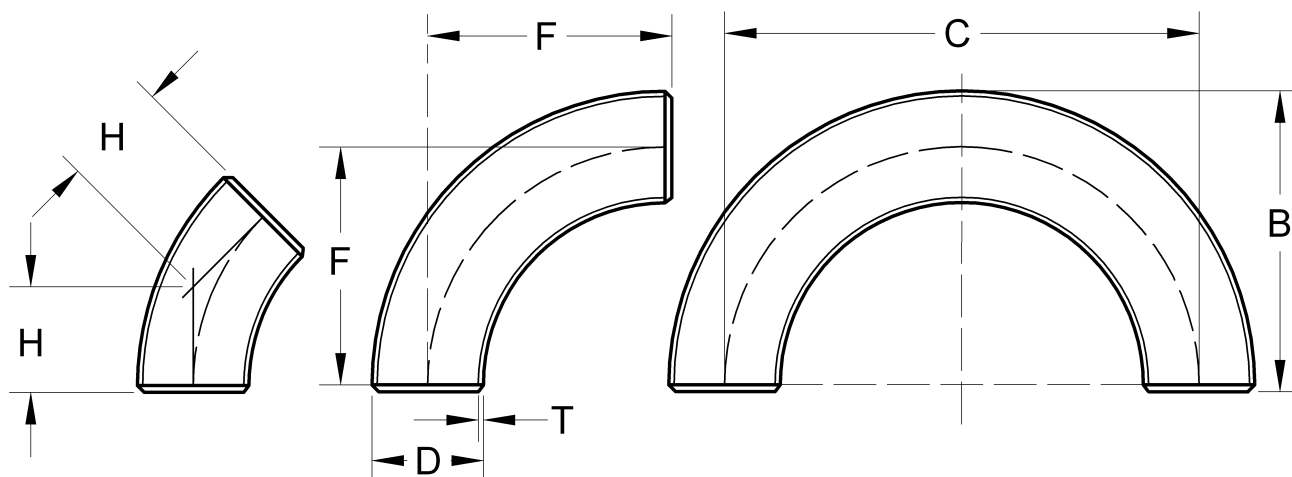



Dimensioni in mm.

D	T	H	F	C	B	Kg.		
						45°	90°	180°
21.3	2.0	18	42.5	85	53	0.05	0.10	0.20
26.9	2.3	24	57.5	115	71	0.06	0.13	0.26
33.7	2.6	30	72.5	145	89	0.11	0.23	0.46
38.0	2.6	34	82.5	165	101	0.14	0.29	0.58
42.4	2.6	38	92.5	185	114	0.18	0.37	0.74
44.5	2.6	40	97.5	195	120	0.20	0.40	0.80
48.3	2.6	45	107.5	215	132	0.25	0.50	1.00
	5.0					0.45	0.90	1.80
54.0	2.6	51	122.5	245	149	0.32	0.64	1.28
57.0	2.9	53	130	260	158	0.39	0.78	1.57
60.3	2.9	56	135	270	165	0.44	0.88	1.76
	4.5					0.66	1.32	2.64
	5.6					0.80	1.60	3.20
70.0	2.9	66	160	320	195	0.60	1.20	2.40
76.1	2.9	73	175	350	213	0.72	1.45	2.90
88.9	3.2	86	205	410	250	1.11	2.23	4.46
	5.6					1.85	3.71	7.42
101.6	3.6	98	235	470	286	1.63	3.26	6.52
108.0	3.6	105	253	506	306	1.84	3.69	7.38
114.3	3.6	112	270	540	327	2.08	4.17	8.34
	6.3					3.56	7.12	14.24
	8.8					4.85	9.71	19.42
133.0	4.0	129	311.5	623	378	3.13	6.27	12.5
139.7	4.0	137	330	660	400	3.60	7.20	14.40
159.0	4.5	155	375	750	454	5.05	10.10	20.10
168.3	4.5	162	390	780	474	5.6	11.20	22.40
	7.1					8.65	17.30	34.60
219.1	6.3	211	510	1020	620	13.25	26.50	53.00
	8.0					16.70	33.40	66.80
	12.5					25.50	51.00	102.00
244.5	6.3	240	580	1160	702	16.90	33.80	67.60
273.0	6.3	269	650	1300	786	20.75	41.50	83.00
323.9	7.1	321	775	1550	937	33.75	67.50	135.00
355.6	8.0	352	850	1700	1026	47.30	94.60	189.20
406.4	8.8	402	970	1940	1173	65.50	131.00	262.00

TEES

EQUAL AND REDUCING TEES

EN 10253-1 - DIN 2615/1 - ISO 3419

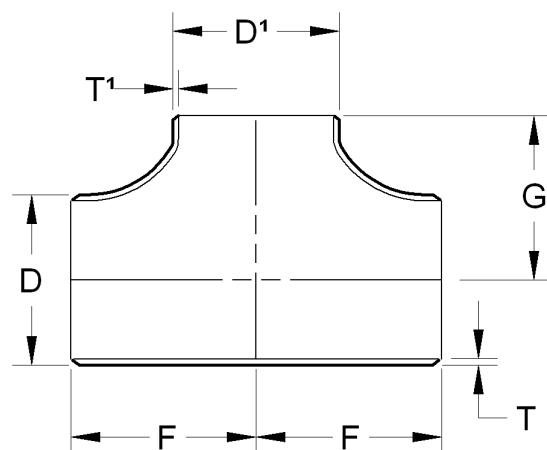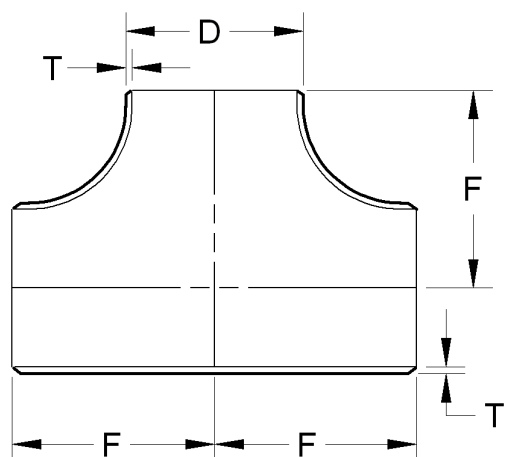



Dimensioni in mm.

D	D1	T	T1	F	G	Kg.	D	D1	T	T1	F	G	Kg.
21.3	21.3	2.0	2.0	25	—	0.08	133.0	133.0	4.0	4.0	120	—	4.80
26.9	26.9	2.3	2.3	29	—	0.12	139.7	139.7	4.0	4.0	124	—	5.10
	21.3		2.0		29	0.12		114.3				117	5.10
33.7	33.7	2.6	2.6	38	—	0.26		88.9				111	5.10
	26.9		2.3		38	0.26		76.1				108	5.10
	21.3		2.0		38	0.26		60.3				105	5.10
42.4	42.4	2.6	2.6	48	—	0.45	159.0	159.0	4.5	4.5	138	—	8.10
	33.7		2.6		48	0.45	168.3	168.3	4.5	4.5	143	—	9.00
	26.9		2.3		48	0.45		139.7				137	9.00
48.3	48.3	2.6	2.6	57	—	0.58		114.3				130	9.00
	42.4		2.6		57	0.58		88.9				124	9.00
	33.7		2.6		57	0.58		76.1				121	9.00
	26.9		2.3		57	0.58		60.3				117	9.00
	21.3		2.0		57	0.58		219.1	6.3	6.3	178	—	18.00
60.3	60.3	2.9	2.9	64	—	0.85	219.1	168.3				168	18.00
	48.3		2.6		60	0.85		139.7				162	18.00
	42.4		2.6		57	0.85		114.3				156	18.00
	33.7		2.6		51	0.85		88.9				152	18.00
	26.9		2.3		44	0.85		273.0	6.3	6.3	216	—	26.50
76.1	76.1	2.9	2.9	76	—	1.20	273.0	219.1				203	26.50
	60.3		2.9		70	1.20		168.3				194	26.50
	48.3		2.6		67	1.20		139.7				191	26.50
	42.4		2.6		64	1.20		114.3				184	26.50
	33.7		2.6		57	1.20		323.9	7.1	7.1	254	—	42.00
88.9	88.9	3.2	3.2	86	—	1.80	323.9	273.0				241	42.00
	76.1		2.9		83	1.80		219.1				229	42.00
	60.3		2.9		76	1.80		168.3				219	42.00
	48.3		2.6		73	1.80	355.6	355.6	8.0	8.0	279	—	71.00
	42.4		2.6		70	1.80		323.9				270	60.00
	33.7		2.6		67	1.80		273.0				257	60.00
101.6	101.6	3.6	3.6	95	—	2.90		219.1				248	54.00
108.0	108.0	3.6	3.6	100	—	3.10		168.3				238	54.00
114.3	114.3	3.6	3.6	105	—	3.10	406.4	139.7	8.8	8.8	305	245	52.00
	88.9		3.2		98	3.10		406.4				—	85.00
	76.1		2.9		95	3.10		355.6				305	85.00
	60.3		2.9		89	3.10		323.9				295	85.00
	48.3		2.6		86	3.10		273.0				283	82.00
								219.1				273	74.00
								168.3				264	74.00

RIDUZIONI

CONC. / ECC. REDUCERS

EN 10253-1 - DIN 2616/1/2 - ISO 3419

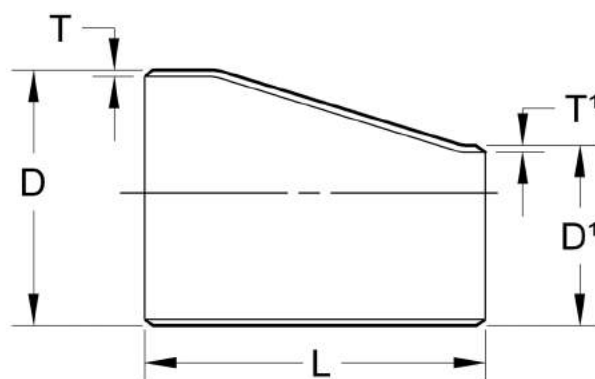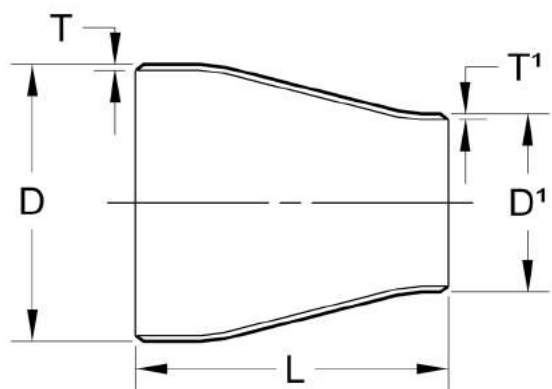



Dimensioni in mm.

D	D1	T	T1	L	Kg.		D	D1	T	T1	L	Kg.
26.9	21.3	2.3	2.0	38	0.05							
33.7	26.9	2.6	2.3	51	0.10		108.0	88.9	3.6	3.2	100	0.90
	21.3		2.0		0.10			76.1		2.9		0.90
42.4	33.7	2.6	2.6	51	0.12			70.0		2.9		0.90
	26.9		2.3		0.12			60.3		2.9		0.90
	21.3		2.0		0.12			48.3		2.6		0.90
48.3	42.4	2.6	2.6	64	0.18			42.4		2.6		0.90
	33.7		2.6		0.18			33.7		2.6		0.90
	26.9		2.3		0.18		114.3	108.0	3.6	3.6	102	0.90
60.3	21.3	2.9	2.0	76	0.30			101.6		3.6		0.90
	48.3		2.6		0.30			88.9		3.2		0.90
	42.4		2.6		0.30			76.1		2.9		0.90
	33.7		2.6		0.30			60.3		2.9		0.90
70.0	26.9	2.9	2.3	89	0.30			48.3		2.6		0.90
	21.3		2.0		0.30			42.4		2.6		0.90
	60.3		2.9	89	0.41		133.0	33.7		2.6		0.90
	48.3		2.6		0.41			114.3	4.0	3.6	127	1.50
76.1	42.4	2.9	2.6		0.41			108.0		3.6		1.50
	33.7		2.6		0.41			88.9		3.2		1.50
	26.9		2.3	89	0.47			76.1		2.9		1.50
	21.3		2.0		0.47			70.0		2.9		1.50
88.9	76.1	3.2	2.9	89	0.56		139.7	60.3	4.0	2.9	127	1.70
	70.0		2.9		0.56			114.3		3.6		1.70
	60.3		2.9		0.56			108.0		3.6		1.70
	48.3		2.6		0.56			101.6		3.6		1.70
	42.4		2.6		0.56			88.9		3.2		1.70
	33.7		2.6	89	0.56			76.1		2.9		1.70
101.6	26.9	3.6	2.3		0.56		159.0	60.3	4.5	2.9	140	2.30
	88.9		3.2		0.88			139.7		4.0		2.30
	76.1		2.9		0.88			133.0		4.0		2.30
	60.3		2.9		0.88			114.3		3.6		2.30
	48.3		2.6		0.88			108.0		3.6		2.30
								88.9		3.2		2.30
								76.1		2.9		2.30
								60.3		2.9		2.30

RIDUZIONI

CONC. / ECC. REDUCERS

EN 10253-1 - DIN 2616/1/2 - ISO 3419

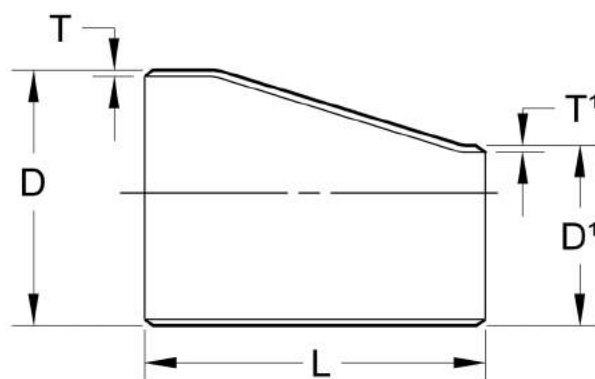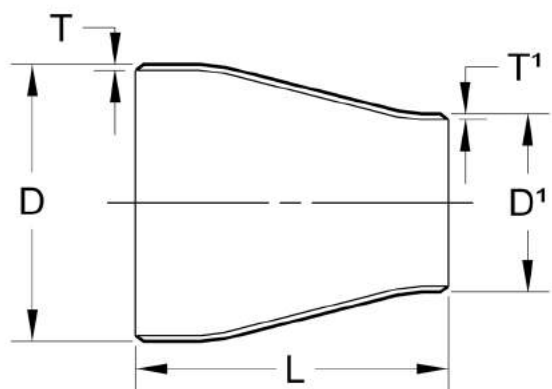


Dimensioni in mm.

D	D1	T	T1	L	Kg.		D	D1	T	T1	L	Kg.
168.3	159.0	4.5	4.5	140	2.50		273.0	219.1	6.3	6.3	178	7.50
	139.7		4.0		2.50			193.7		5.6		7.50
	133.0		4.0		2.50			168.3		4.5		7.50
	114.3		3.6		2.50			159.0		4.5		7.50
	108.0		3.6		2.50			139.7		4.0		7.50
	101.6		3.6		2.50			133.0		4.0		7.50
	88.9		3.2		2.50			114.3		3.6		7.50
	76.1		2.9		2.50			108.0		3.6		7.50
	60.3		2.9		2.50							
193.7	168.3	5.6	4.5	152	3.90		323.9	273.0	7.1	6.3	203	11.00
	159.0		4.5		3.90			219.1		6.3		11.00
	139.7		4.0		3.90			168.3		4.5		11.00
	133.0		4.0		3.90			139.7		4.0		11.00
	114.3		3.6		3.90		355.6	323.9	8.0	7.1	330	22.00
	114.3		3.6		3.90			273.0		6.3		22.00
	108.0		3.6		3.90			219.1		6.3		22.00
	101.6		3.6		3.90			168.3		4.5		22.00
219.1	88.9	6.3	3.2	152	3.90		406.4	355.6	8.8	8.0	356	30.00
	193.7		5.6		5.00			323.9		7.1		30.00
	168.3		4.5		5.00			273.0		6.3		30.00
	159.0		4.5		5.00			219.1		6.3		30.00
	139.7		4.0		5.00		508.0	406.4	11.0	8.8	508	68.00
	133.0		4.0		5.00			355.6		8.0		68.00
	114.3		3.6		5.00			323.9		7.1		68.00
	108.0		3.6		5.00			273.0		6.3		68.00
	101.6		3.6		5.00			219.1		6.3		68.00
	88.9		3.2		5.00		609.6	508.0	12.5	11.0	-	93.00
	76.1		2.9		5.00			406.4		8.8		93.00
								355.6		8.0		93.00
								323.9		7.1		93.00

FONDELLI

DISHED ENDS

EN 10253-1

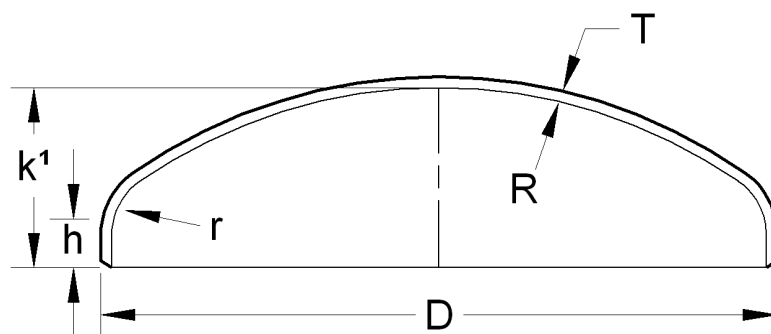

$$r = 0.1D$$

$$R = D$$


Dimensioni in mm.

D	T	h	K1	TOLL. K 1	Kg.
21.3	2.0	—	—	± 4	0.02
26.9	2.3	—	—		0.02
33.7	2.6	4	11		0.03
38.0	2.6	4	11		0.04
42.4	2.6	4	11		0.04
44.5	2.6	4	11		0.05
48.3	2.6	4	11.5		0.06
54.0	2.6	4	12.5		0.07
57.0	2.9	4	13		0.09
60.3	2.9	6	16.5		0.12
70.0	2.9	6	17.5		0.16
76.1	2.9	6	18.5		0.21
88.9	3.2	8	23		0.28
101.6	3.6	8	24.5		0.36
108.0	3.6	8	25.5		0.39
114.3	3.6	8	26		0.42
133.0	4.0	10	32	± 7	0.56
139.7	4.0	12	35.5		0.62
159.0	4.5	15	43		1.11
168.3	4.5	15	44.5		1.23
193.7	5.6	20	56		1.89
219.1	6.3	30	68.5		2.21
244.5	6.3	30	75		3.90
273.0	6.3	40	90		5.40
323.9	7.1	40	99		7.30
355.6	8.0	40	106		9.80
406.4	8.8	50	125		16.00

FONDI BOMBATI

CAPS

EN 10253-1 - DIN 2617 - ISO 3419

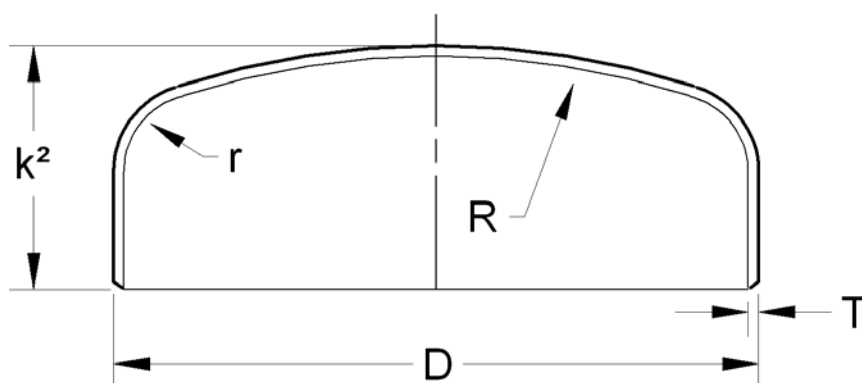

$$r = 0.15D$$


$$R = 0.80D$$

Dimensioni in mm.

D	T	K2	TOLL. K 2	Kg.
21.3	2.0	25	± 4	0.04
26.9	2.3	25		0.05
33.7	2.6	25		0.09
42.4	2.6	25		0.11
48.3	2.6	38		0.12
60.3	2.9	38		0.17
76.1	2.9	38		0.21
88.9	3.2	51		0.38
101.6	4.0	64		0.50
114.3	3.6	64		0.71
139.7	4.5	76	± 7	1.10
168.3	4.5	89		1.78
219.1	6.3	102		3.70
273.0	6.3	127		5.91
323.9	7.1	152		9.57
355.6	8.0	165		12.87
406.4	8.8	178		17.51
457.2	10.0	203		25.63
508.0	11.0	229		35.51
609.6	12.5	267		60.00

INNESTI A SCARPA

BRANCH FITTINGS

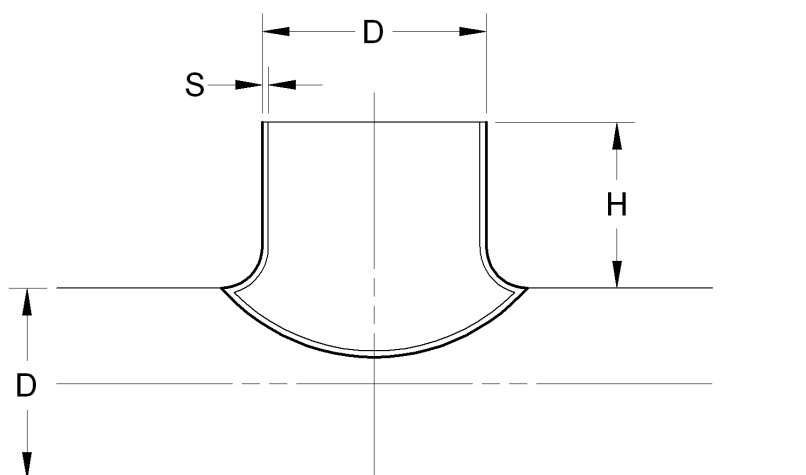


Dimensioni in mm.

D	S	H	TOLL. H	Kg.
21.3	2.0	30	± 5	0.03
26.9	2.3	30		0.06
33.7	2.6	30		0.08
38.0	2.6	35		0.12
42.4	2.6	35		0.13
44.5	2.6	35		0.14
48.3	2.6	40		0.18
57.0	2.9	40		0.25
60.3	2.9	45		0.27
70.0	2.9	50		0.36
76.1	2.9	50		0.45
88.9	3.2	60		0.60
101.6	3.6	65	± 10	1.00
108.0	3.6	65		1.05
114.3	3.6	65		1.10
133.0	4.0	85		1.70
139.7	4.0	85		1.80
159.0	4.5	100		2.70
168.3	4.5	100		2.80
193.7	5.6	125		4.70
219.1	6.3	135		6.40
244.5	6.3	150		8.30
273.0	6.3	150		9.90
323.9	7.1	175		15.80
355.6	8.0	200		22.20
406.4	8.8	200	± 25	30.00
508.0	11.0	250	± 40	58.00
609.6	12.5	350		92.00

CURVE A SELLA 3 D

BENDS FOR WELDING BA 3

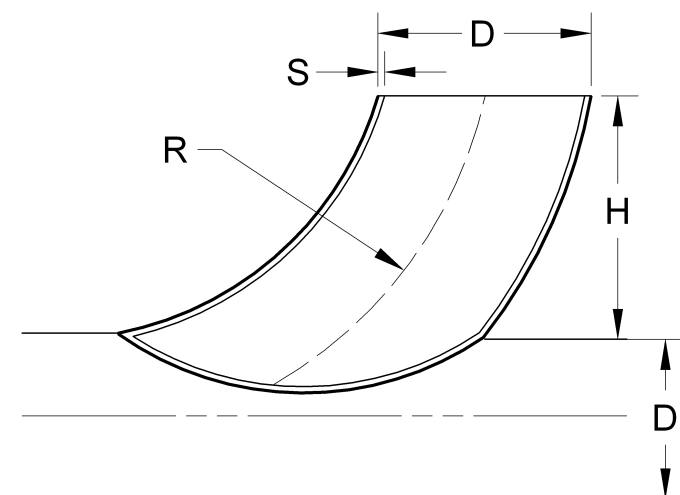

Dimensioni in mm.

D	S	R	H	TOLL. H	Kg.
21.3	2.0	28	17	± 3	0.02
26.9	2.3	29	16		0.04
33.7	2.6	38	21		0.07
38.0	2.6	45	26		0.10
42.4	2.6	48	27		0.11
44.5	2.6	51	29		0.13
48.3	2.6	57	33		0.16
57.0	2.9	72	44		0.26
60.3	2.9	76	46		0.30
70.0	2.9	92	57		0.42
76.1	2.9	95	57		0.48
88.9	3.2	114	70		0.70
101.6	3.6	133	83	± 4	1.10
108.0	3.6	142	89		1.20
114.3	3.6	152	95		1.40
133.0	4.0	181	115	± 5	2.20
139.7	4.0	190	120		2.40
159.0	4.5	216	137		3.50
168.3	4.5	229	145		3.50
193.7	5.6	270	173		6.40
219.1	6.3	305	195		9.00
273.0	6.3	381	245	± 7	15.00
323.9	7.1	457	295		24.00
355.6	8.0	533	355	± 15	34.00
406.4	8.8	610	407		49.00
508.0	11.0	762	508	± 40	97.00
609.6	12.5	914	609	± 60	162.00

APPENDICE INFORMATIVA

ACCIAI AL CARBONIO

CARBON STEEL

EN 10027-1 ECISS IC 10	EN 10027 - 2	EN 10025 1990	Germania	Francia	Regno Unito	Spagna	Italia	Belgio	Austria
S185	1.0035	Fe310-0	St 33	A 33	-	A 310-0	Fe 320	A 320	St320
S235JR	1.0037	Fe 360 B	St 37-2	E 24-2			Fe 360 B	AE 235-B	
S235JRG1	1.0036	Fe 360 BFU	USt 37-2			AE 235B-FU			Ust 360 B
S235JRG2	1.0038	Fe 360 BFN	RSt 37-2		40 B	AE 235B-FN			RSt 360 B
S235J0	1.0114	Fe 360 C	St 37-3 U	E 24-3	40 C	AE 235 C	Fe 360 C	AE 235-C	St 360 C
S235J2G3	1.0116	Fe 360 D1	St 37-3 N	E 24-4	40 D	AE 235 D	Fe 360 D	AE 235-D	St 360 CE
S235J2G4	1.0117	Fe 360 D2	-						St 360 D
S275JR	1.0044	Fe 430 B	St 44-2	E 28-2	43 B	AE 275 B	Fe 430 B	AE 255-B	St 430 B
S275J0	1.0143	Fe 430 C	St 44-3 U	E 28-3	43 C	AE 275 C	Fe 430 C	AE 255-C	St 430 C
S275J2G3	1.0144	Fe 430 D1	St 44-3 N	E 28-4	43 D	AE 275 D	Fe 430 D	AE 255-D	St 430 CE
S275J2G4	1.0145	Fe 430 D2	-						St 430 D
S355JR	1.0045	Fe 510 B	-	E 36-2	50 B	AE 355 B	Fe 510 B	AE 355-B	
S355J0	1.0553	Fe 510 C	St 52-3 U	E 36-3	50 C	AE 355 C	Fe 510 C	AE 355-C	St 510 C
S355J2G3	1.0570	Fe 510 D1	St 52-3 N		50 D	AE 355 D	Fe 510 D	AE 355-D	St 510 D
S355J2G4	1.0577	Fe 510 D2	-						
S355K2G3	1.0595	Fe 510 DD1	-	E 36-4	50 DD			AE 355-DD	
S355K2G4	1.0596	Fe 510 DD2	-						
E295	1.0050	Fe 490-2	St 50-2	A 50-2		A 490	Fe 490	A 490-2	St 490
E335	1.0060	Fe 590-2	St 60-2	A 60-2		A 590	Fe 590	A 590-2	St 590
E360	1.0070	Fe 690-2	St 70-2	A 70-3		A 690	Fe 690	A 690-2	St 690

DESIGNAZIONE EN 10273-2000	EN 10027 - 2	Germania	
P250 GH	1.0460	C 22.8	
P265GH	1.0425	St 35.8.I HII	

Il Presente Catalogo in tutte le sue pagine è a carattere indicativo.
Pertanto deve essere integrato e verificato con le normative ufficiali corrispondenti.

This catalogue is only for information.
Please very with officials standards.

Nantong ROKE Fluid Equipment Co.,LTD

ROKE Factory

Pingchao Town, Tongzhou Area
Nantong City, Jiangsu Province, China
Tel :86-513-86751377
Fax:86-513-86752577

ROKE Office

Room 1108 .Building B. Jianghaicaifudasha
No.817.Jianghai Avenue.Gangzha Area
Nantong City, Jiangsu Province, China
Tel: 86-513-85400443
Fax:86-513-85400444
Web:www.chinaroke.com
E-mail:sales01@ntroke.com

ROKE
Valves and Fittings

www.chinaroke.com